


Submittal Drawing 1

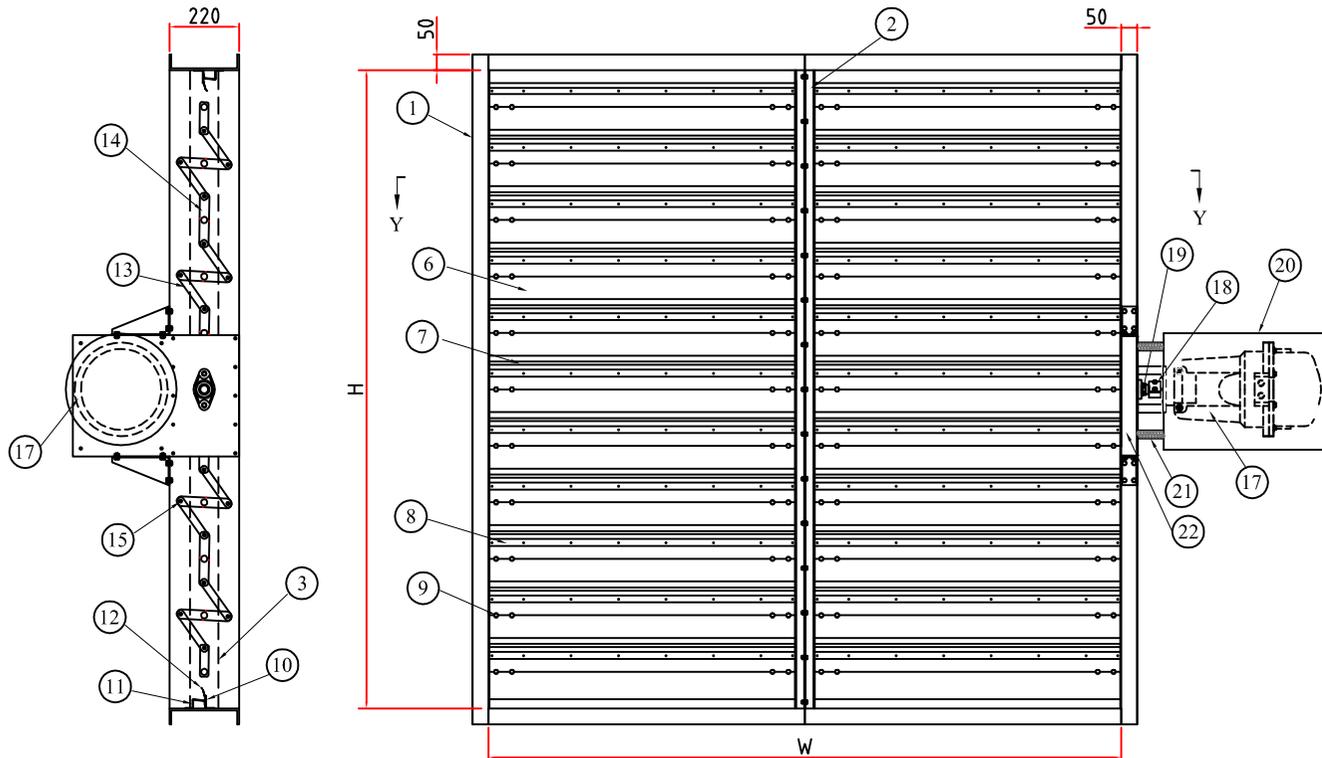

View from Right
(Damper in Fully Closed)

Section Y-Y
(Damper in Fully Closed)

No.	Descriptions	Materials
1	Damper Frame	Galvanized Steel, 6.0mm (t)
2	Intermediate support	Galvanized Steel, 2.5mm (t)
3	Jamb Seal	Stainless Steel SUS304, 0.15mm (t)
4	Blade Axle	Stainless Steel SUS304, ϕ 20mm
5	Bush	Bronze sintered
6	Blade	Galvanized Steel, 2.0mm (t); Width: 195mm
7	Blade Edge Seal	Stainless Steel SUS304, 0.15mm (t)
8	Blade Edge Seal Holding Plate	Galvanized Steel, 1.5mm (t)
9	Blade / Axle Fasteners	Stainless Steel SUS304, M8 Bolt & Nut
10	Blade Stop	Galvanized Steel, 2.0mm (t)
11	Blade Stop Base	Galvanized Steel, 2.0mm (t)
12	Blade Stop Seal	Stainless Steel SUS304, 0.15mm (t)
13	Blade Linkage Bar	Stainless Steel SUS304, 6mm x 20mm
14	Blade Linkage Bracket	Stainless Steel SUS304, 5.0mm (t)
15	Blade Linkage Pin	Stainless Steel SUS304, ϕ 9.5mm
16	Damper Drive Axle	Stainless Steel SUS304, ϕ 20mm
17	Actuator	Electric Operated Actuator
18	Manual Override	Cadmium Plated Steel
19	Self-Alignment Ball Bearing	Cast Iron Housing with High Temp. Grease
20	Thermal jacket	Silicon-impregnated fibreglass fabric
21	Insulation box	Galvanized steel 0.7mm (t) with 25mm insulation foam
22	Damper Mounting bracket	Galvanized steel, 9mm

In the interest of product improvement, we reserved the right to make changes without notice.

All dimensions are in mm

 OLS Manufacturing (S) Co. Pte. Ltd. 3-B, Joo Koon Circle, Singapore 629034 Tel.: 68615253 Fax.: 68619850 email: sales@connols-air.com web: http://www.connols-air.com	Title : TFSD460 Heavy Duty Fire-Smoke Damper c/w Electric Actuator	Dwn. By : Oscar OSCAR	Date : 24/01/2018	Scale :
	Project :	Chk. By : Wong Wong	Dwg. No. : DDZER019	N.T.S
		App. By : Steven		